
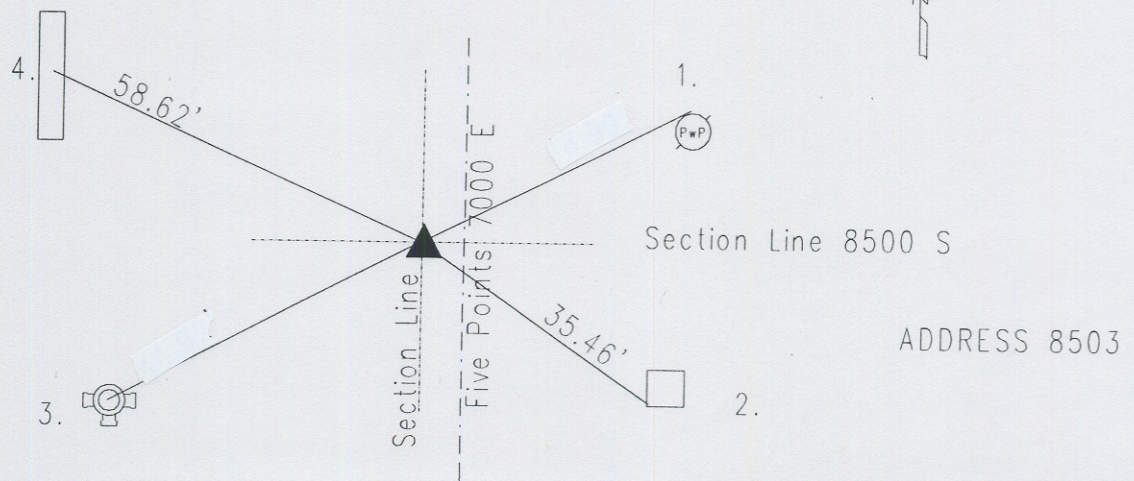


E: 67555.9724(m)



Corner originally set as a post in 1820 by John Hendricks with the following witnesses: 18" ash bearing south 23 degrees, thence west 18 links, and a 8" sugar bearing north 4 degrees, thence east 35 links. (M.C. Atlas p. 9) A survey by D.B. Hasbrook on February 12, 1852 indicates no stone or witnesses. (Franklin Legal Bookp.28) Corner referenced by Burres on 8/5/63 and called a pipe. Corner referenced by McIand on 3/25/69 and called a pipe. Corner referenced by McIand on 5/1/72 and called an iron pipe. Corner referenced by Wilcoxon on 7/2/75 and called an iron pipe. Corner referenced by Greene on 10/31/90 and called a R.R. spike 4" down. Corner referenced by Kiste on 10/14/94 and called a R.R. spike. Corner referenced by Kiste on 7/27/99 and called a R.R.spike. Corner excavated by Wilcoxon on 10/23/02 and a R.R.spike was found 3" down. No other points were found. A #205 cast iron Harrison monument was set in position as the corner.

[illegible]